




DTS36 Series

Aluminum door - 36" opening

Aluminum Door 36" opening

DST36 Series

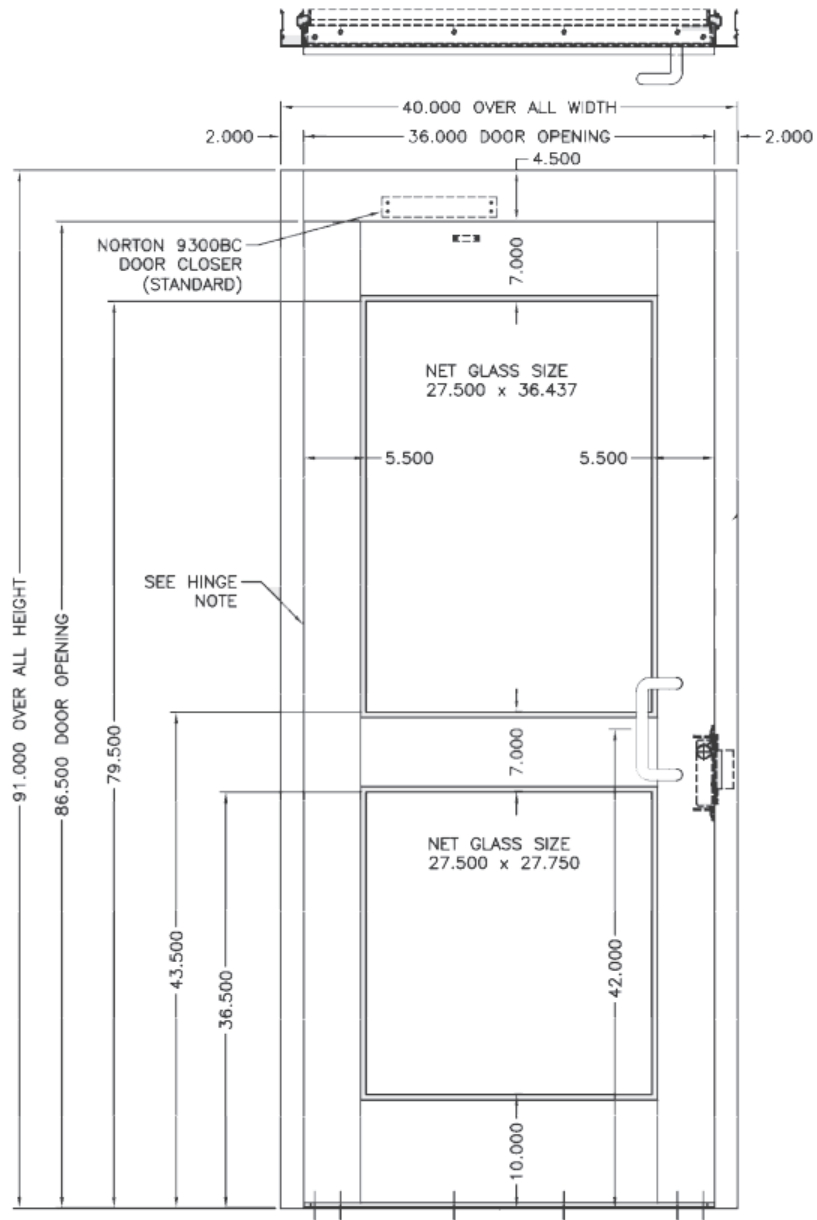

Dimensions are approximate.

Measures:

- Door Opening (pedestrian clearance): 36" (914mm)
- Frame: 2"
- Exterior Height: 91" (2331 mm)
- Interior Height: 86.5

Options:

- Magnetic lock (replaces strike)
- Push Buttons (wired or wireless)
- Norton 5730 Low Energy Operator, aluminum
- Push to exit panic bar by Adams Rite 8400, Aluminum

Product Features and Hardware:

- Standard Clear Anodized Aluminum Extrusion (Dark Bronze Anodizing also available)
- Door handle
- Hydraulic Closer: Norton 9300 Series with aluminum finish
- Electronic Strike – Adams Rite 7100 Series, 24 VDC
- Deadlock: Adams Rite 4510 Series with 31/32" Backset
- Cylinder: Schlage C keyway-Standard – SFIC available

Design & Construction:

- Designed for secure operation with aesthetics in mind
- Minimal exposed hardware
- Continuous Hinge

Electrical Specifications:

UL listed electronic strike:

Input voltage: 24VDC

Input current: 170mA

Standards and Codes:

Austenitic stainless steel:
ASTM A240, A249, A276

Hot rolled steel:
AISI C-1020, AISI C-1018

Hot dipped galvanizing:
ASTM A-143, ASTM A-153-80

All fasteners provided meet IFI ANSI/ASME Fastener Standards

American Welding Society (AWS)
Standard D 1.1

Matching Full-Height Turnstiles available in DST80-Single, DST80-Tandem, DSP60 or DSRD70 aluminum-polycarbonate full height turnstiles